

## 半導體放電管規格書 Thyristor Surge Suppressor(TSS) Specification


### 4、BSxxxxM系列 BSxxxxM Series

#### BSxxxxM 50A SMA 貼片二極管產品規格參數(BSxxxxM 50A Specification)

型號 P/N	斷態電壓		轉折電壓		通態壓降		維持電流	極間電容
	V <sub>DRM</sub>	I <sub>D</sub>	V <sub>S</sub>	I <sub>S</sub>	V <sub>T</sub>	I <sub>T</sub>	I <sub>H</sub>	C <sub>0</sub>
	(V)	( $\mu$ A)	(V)	(mA)	(V)	(A)	(mA)	(pF)
		MAX	MAX		MAX		MIN	MAX
BS0060M	6	5	25	800	4	1	40	50
BS0300M	25	5	40	800	4	1	50	60
BS0640M	58	5	77	800	4	1	150	60
BS0720M	65	5	88	800	4	1	150	60
BS0800M	75	5	98	800	4	1	150	60
BS1800M	160	5	220	800	4	1	150	60
BS2300M	190	5	260	800	4	1	150	60
BS2600M	220	5	300	800	4	1	150	50
BS3100M	275	5	350	800	4	1	150	50
BS3500M	320	5	400	800	4	1	150	20



### 外形尺寸 Size

尺寸	A (mm)	B (mm)	C (mm)	D (mm)
SMA	1.29-1.70	2.18-2.79	4.06-4.57	1.70-2.31
尺寸	E (mm)	F (mm)	G (mm)	H (mm)
SMA	0.15-0.31	0.89-1.50	0.10-0.20	4.70-5.31

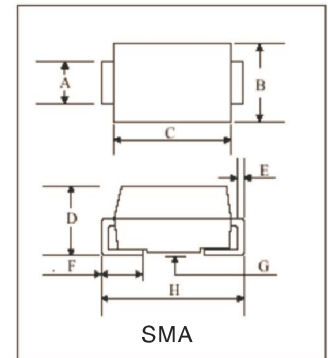

### 焊盤推薦及焊接曲綫

#### PAD and Reflow Profile

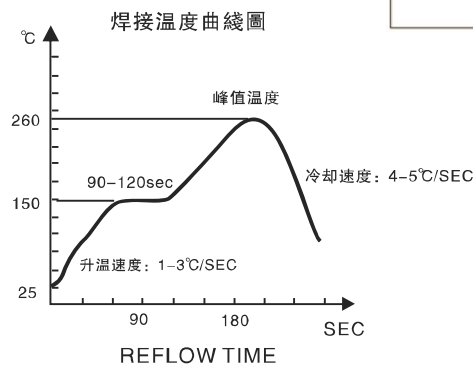

封裝形式 OUTLINE	每卷 (PCS) REEL(PCS)	每箱 (PCS) PER CARTON(PCS)	卷盤直徑 (mm) REEL DIAMETERS(mm)	外包箱尺寸 (mm) CARTON SIZE(mm)		
				L	W	H
SMA	編帶包裝 TAPING	5000	40000	330	360	360